

Ficha técnica

Epson

Modelos / familias

CW-C4000E

Fuente del fabricante

CW-C4000E User/Technical Guide

https://files.support.epson.com/pdf/pos/bulk/cw-c4000_ug_en_rev_b.pdf

Las páginas siguientes son un extracto técnico del documento oficial del fabricante.

Specifications

Specifications

This chapter describes the specifications of the printer.

Product Specifications

Item			Specifications
Printing method			Serial inkjet, dot matrix method Four-color printing
Paper feed method			Forward and reverse friction feed
Cutting type of the auto cutter			Full cut (cuts paper completely)
Print resolution			300 × 600 dpi 600 × 600 dpi 600 × 1200 dpi 1200 × 1200 dpi
Print speed	Print quality setting: Max Speed 300 × 600 dpi (width × height)	Printing width: 25.4 mm	124 mm/s
		Printing width: 101.6 mm	100 mm/s
	Print quality setting: Speed 600 × 600 dpi (width × height)	Printing width: 25.4 mm	111 mm/s
		Printing width: 101.6 mm	70 mm/s
	Print quality setting: Normal 600 × 600 dpi (width × height)	Printing width: 25.4 mm	63 mm/s
		Printing width: 101.6 mm	48 mm/s
	Print quality setting: Quality 600 × 1200 dpi (width × height)	Printing width: 25.4 mm	27 mm/s
		Printing width: 101.6 mm	18 mm/s
	Print quality setting: Max Quality 1200 × 1200 dpi (width × height)	Printing width: 25.4 mm	11 mm/s
		Printing width: 101.6 mm	8 mm/s
Interface		Wired LAN	1000BASE-T/100BASE-TX/10BASE-T
		Wireless LAN	Available by connecting the optional Wireless LAN Unit (OT-WL06).
		USB	USB2.0 High-Speed

Specifications

Item	Specifications
Weight	Approx. 13 kg

Specifications

Electrical Specifications



Item		Specifications
Power supply		Dedicated AC adapter (AC ADAPTER, K1, Model number: M248B)
Rated voltage		42 V DC
Rated current		1.38 A
Power consumption	Operating*	Approx. 28.2 W on average
	Standby	Approx. 2.6 W on average
	Power off	Approx. 0.13 W on average

*Based on Epson evaluation conditions

Specifications



Overall Dimensions

Item	Specifications
Height	285 mm
Width	310 mm
Depth	283 mm

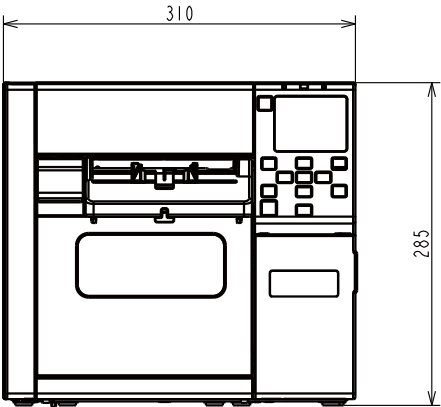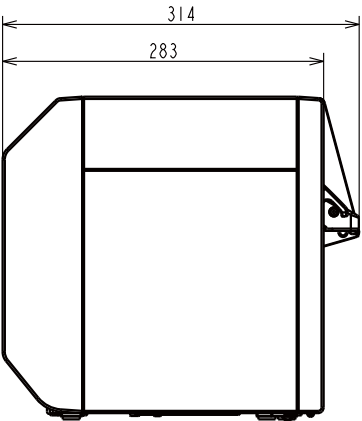

Unit: mm

With OT-PT40 Installed

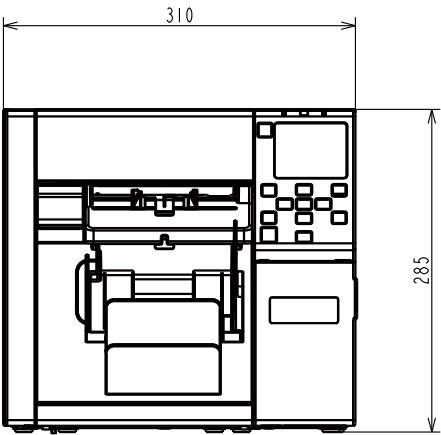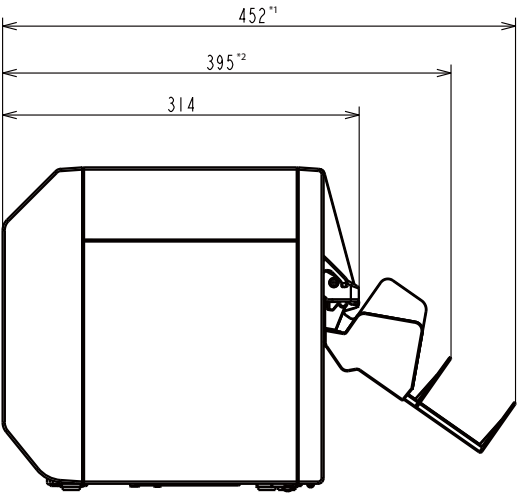


Unit: mm

*1: When paper tray is extended

*2: When paper tray is retracted

Specifications

Environmental Specifications

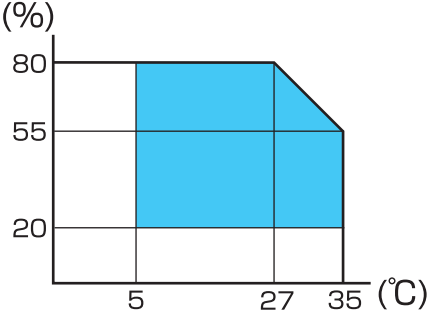Temperature /humidity	Printing	5 to 35°C, 20 to 80%RH without condensation (the blue-colored range in the graph) 		
	Barcode printing	15 to 35°C, 20 to 85% RH without condensation		
	Storage	When packed (Ink not charged)		-20 to 60°C, 5 to 85% RH without condensation (When -20°C or 60°C, within 120 hours)
		With ink charged	Gloss black ink	-15 to 40°C (Within 6 months at 0 to 25°C) (Within 1 month at 40°C)
			Matte black ink	-10 to 40°C (Within 6 months at 0 to 25°C) (Within 1 month at 40°C)
Elevation		0 to 3000 m		
Noise		Approx. 58 dB Based on Epson evaluation conditions.		

Specifications

Paper Specifications

The following types of paper can be used with the printer.

Paper Type	When using Matte Ink	When using Gloss Ink
Plain paper	✓	-
Matte paper	✓	✓
Texture Paper	✓	-
Synthetic	✓	✓
Wristband paper	✓	-
Glossy paper	-	✓
Glossy Film	-	✓
High Glossy Paper	-	✓