

Ficha técnica

Brother

Modelos / familias

DCP-J1310DW, MFC-J4350DW

Fuente del fabricante

Online User's Guide (HTML/PDF)

https://support.brother.com/g/s/id/html/doc/mfc/cv_dcpj1360dw/uke/PDF/PDF.pdf

Las páginas siguientes son un extracto técnico del documento oficial del fabricante.

Specifications



- >> General Specifications
- >> Document Size Specifications
- >> Print Media Specifications
- >> Fax Specifications
- >> Copy Specifications
- >> USB Flash Drive Specifications
- >> Scanner Specifications
- >> Printer Specifications
- >> Interface Specifications
- >> Network Specifications
- >> Computer Requirements Specifications

General Specifications



Printer Type		Inkjet
Print Head	Mono	Piezo with 210 nozzles x 1
	Colour	Piezo with 70 nozzles x 3 (DCP-J1310DW/DCP-J1313DW/DCP-J1360DW) Piezo with 210 nozzles x 3 (DCP-J1460DW/MFC-J4350DW/MFC-J4550DW)
Memory Capacity		256 MB
Liquid Crystal Display (LCD)		• DCP-J1310DW/DCP-J1313DW/DCP-J1360DW/MFC-J4350DW ¹ 1.8 in. (4.5 cm) TFT Colour LCD • DCP-J1460DW/MFC-J4550DW ¹ 2.7 in. (6.8 cm) TFT Colour Touchscreen LCD
Power Source		AC 220 to 240 V 50/60 Hz
Power Consumption ²		• DCP-J1310DW/DCP-J1313DW/DCP-J1360DW Copying ³: Approx. 21 W Ready ⁴: Approx. 2.5 W Sleep ⁴: Approx. 0.6 W Power Off ^{4 5}: Approx. 0.15 W • DCP-J1460DW Copying ³: Approx. 21 W Ready ⁴: Approx. 2.5 W Sleep ⁴: Approx. 0.6 W Power Off ^{4 5}: Approx. 0.15 W • MFC-J4350DW Copying ³: Approx. 21 W Ready ⁴: Approx. 3.5 W Sleep ⁴: Approx. 0.8 W Power Off ^{4 5}: Approx. 0.10 W • MFC-J4550DW Copying ³: Approx. 22 W Ready ⁴: Approx. 3.5 W Sleep ⁴: Approx. 0.9 W Power Off ^{4 5}: Approx. 0.10 W

Dimensions



- DCP-J1310DW/DCP-J1313DW

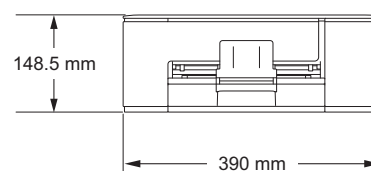


- DCP-J1360DW/DCP-J1460DW

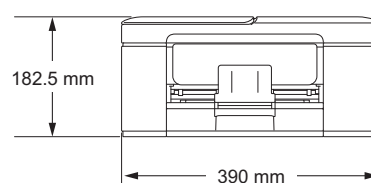

- MFC-J4350DW

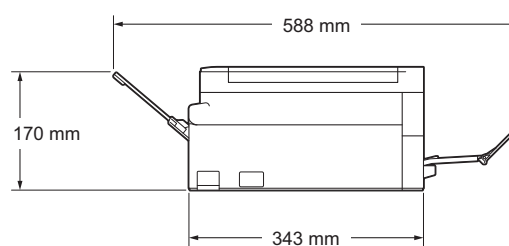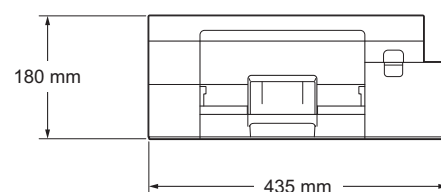

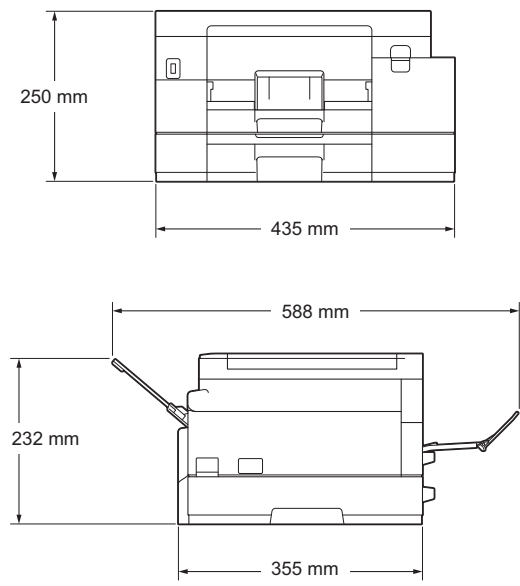			MFC-J4550DW 
Weights			- DCP-J1310DW/DCP-J1313DW 6.3 kg - DCP-J1360DW/DCP-J1460DW 7.6 kg - MFC-J4350DW 8.9 kg - MFC-J4550DW 10.4 kg
Noise Level	Sound Pressure ⁶	Operating	- DCP-J1310DW/DCP-J1313DW - Printing 55.0 dB (A) (Approx.) - Copying (using the scanner glass) 53.0 dB (A) (Approx.) - DCP-J1360DW/DCP-J1460DW - Printing 55.0 dB (A) (Approx.) - Copying (using the scanner glass) 53.0 dB (A) (Approx.) - MFC-J4350DW/MFC-J4550DW - Printing 54.0 dB (A) (Approx.) - Copying (using the scanner glass) 51.0 dB (A) (Approx.)
	Sound Power ⁷	Printing ⁸	- MFC-J4350DW LWAc = 6.66 B(A) (Mono) - MFC-J4550DW LWAc = 6.66 B(A) (Mono)
			- MFC-J4350DW LWAc = 6.58 B(A) (Colour) - MFC-J4550DW LWAc = 6.58 B(A) (Colour)
Temperature	Operating		10 to 35°C

Temperature	Best Print Quality	20 to 33°C
Humidity	Operating	20 to 80% (without condensation)
	Best Print Quality	20 to 80% (without condensation)
Automatic Document Feeder (ADF) (DCP-J1360DW/DCP-J1460DW/MFC-J4350DW/ MFC-J4550DW)		Up to 20 pages Paper: 80 g/m ²

- 1 Measured diagonally
- 2 Measured when the machine is connected to the USB interface. Power consumption varies slightly depending on the usage environment or part wear.
- 3 (DCP-J1310DW/DCP-J1313DW) When single-sided printing, resolution: standard / document: ISO/IEC 24712 printed pattern.
(DCP-J1360DW/DCP-J1460DW/MFC-J4350DW/MFC-J4550DW) When using ADF, single-sided printing, resolution: standard / document: ISO/IEC 24712 printed pattern.
- 4 Measured according to IEC 62301 Edition 2.0.
- 5 Even when the machine is turned off, it will automatically turn itself on periodically for print head maintenance, and then turn itself off.
- 6 Noise depends on printing conditions.
- 7 Measured in accordance with the method described in ISO 7779.
- 8 <Print speed>
MFC-J4350DW: 20.0 ipm (Mono) / 19.0 ipm (Colour)
MFC-J4550DW: 20.0 ipm (Mono) / 19.0 ipm (Colour)
These print speeds are for 1-sided printing and measured in accordance with the ISO/IEC 24734 standard.

Document Size Specifications

Document Size	ADF Width (DCP-J1360DW/DCP-J1460DW/MFC-J4350DW/ MFC-J4550DW)	139.7 to 215.9 mm
	ADF Length ¹ (DCP-J1360DW/DCP-J1460DW/MFC-J4350DW/ MFC-J4550DW)	• DCP-J1360DW/DCP-J1460DW 210 to 355.6 mm • MFC-J4350DW/MFC-J4550DW 148 to 355.6 mm
	Scanner Glass Width	Max. 215.9 mm
	Scanner Glass Length	Max. 297 mm

- 1 Documents that are longer than 297 mm must be fed one page at a time.

Print Media Specifications

Paper Input	Paper Tray #1	Paper Type ¹	Plain Paper, Inkjet Paper (coated paper), Glossy Paper, Recycled Paper
		Paper Size	A4, Letter, Legal, Mexico Legal, India Legal, Folio, Executive, A5, A6, Envelopes (C5, Com-10, DL, Monarch), Photo (10 x 15 cm), Photo L (9 x 13 cm), Photo 2L (13 x 18 cm), Index card (13 x 20 cm)
		Maximum Paper Capacity	Up to 150 sheets of 80 g/m ² plain paper
	Paper Tray #2 (MFC-J4550DW)	Paper Type	Plain Paper, Recycled Paper
		Paper Size	A4, Letter, Legal, Mexico Legal, India Legal, Folio, Executive, A5
		Maximum Paper Capacity	Up to 250 sheets of 80 g/m ² plain paper
	Manual Feed Slot (MFC-J4350DW/ MFC-J4550DW)	Paper Type ¹	Plain Paper, Inkjet Paper (coated paper), Glossy Paper, Recycled Paper
		Paper Size	A4, Letter, Legal, Mexico Legal, India Legal, Folio, Executive, A5, A6, Envelopes (C5, Com-10, DL,

Paper Input	Manual Feed Slot (MFC-J4350DW/ MFC-J4550DW)		Monarch), Photo (10 x 15 cm), Photo L (9 x 13 cm), Photo 2L (13 x 18 cm), Index card (13 x 20 cm)
		Maximum Paper Capacity	Up to 1 sheet
Paper Output ^{1 2}			- DCP-J1310DW/DCP-J1313DW/DCP-J1360DW/ DCP-J1460DW Up to 50 sheets of 80 g/m² Plain Paper (face up print delivery to the output paper tray) - MFC-J4350DW/MFC-J4550DW Up to 100 sheets of 80 g/m² Plain Paper (face up print delivery to the output paper tray)

¹ For glossy paper, remove any printed pages from the output paper tray immediately to avoid smudging.

² Actual output tray capacity may vary depending on environmental conditions.

Fax Specifications



This feature is available for MFC-J4350DW/MFC-J4550DW.

Compatibility	ITU-T Group 3
Modem Speed	Automatic Fallback: 14,400 bps
Scanning Width (Single-sided document)	ADF: 208 mm (A4) Scanner Glass: 204 mm (A4)
Printing Width	204 mm (A4)
Greyscale	Monochrome: 8 bit (256 levels) Colour: 24 bit (8 bit per colour/256 levels)
Resolution (Horizontal)	203 dpi
Resolution (Vertical)	Standard: 98 dpi (Mono) 196 dpi (Colour)
	Fine: 196 dpi (Mono) 196 dpi (Colour)
	Superfine: 392 dpi (Mono)
	Photo: 196 dpi (Mono)
Address Book	40 numbers (MFC-J4350DW) 100 names x 2 numbers (MFC-J4550DW)
Groups	Up to 6
Broadcasting	90 (40 Address Book/50 Manual Dial) (MFC-J4350DW) 250 (200 Address Book/50 Manual Dial) (MFC-J4550DW)
Automatic Redial	3 times at 5 minute intervals
Memory Transmission	MFC-J4350DW: Up to 170 pages ¹ MFC-J4550DW: Up to 180 pages ¹
Out of Paper Reception	MFC-J4350DW: Up to 170 pages ¹ MFC-J4550DW: Up to 180 pages ¹

¹ 'Pages' refers to the 'ITU-T Test Chart #1' (a typical business letter, Standard resolution, MMR code).

Copy Specifications

Colour/Monochrome	Yes/Yes
Copy Width	204 mm ¹
Multiple Copies	Stacks/Sorts up to 99 pages
Enlarge/Reduce	25% to 400% (in increments of 1%)
Resolution	Prints up to 1200 × 1800 dpi (DCP-J1310DW/DCP-J1313DW/DCP-J1360DW) Prints up to 1200 × 2400 dpi (DCP-J1460DW/MFC-J4350DW/MFC-J4550DW)

¹ When copying on A4 size paper.

USB Flash Drive Specifications



This function is available for MFC-J4550DW.

Compatible Media ¹		USB Flash drive ²
JPEG Print	Resolution	Up to 1200 x 4800 dpi
	Paper Type	Plain Paper, Inkjet Paper (coated paper), Glossy Paper
	Paper Size	A4, Letter, Photo (10 x 15 cm), Photo 2L (13 x 18 cm)
	File Format	JPEG (Progressive JPEG format is not supported)
Scan to Media	File Format	JPEG, PDF (Colour, Grey) TIFF, PDF (Monochrome)

¹ USB Flash drives are not supplied with product.

² Hi-Speed USB 2.0. USB Mass Storage standard. Supported formats: FAT12/FAT16/FAT32/exFAT

Scanner Specifications

Colour/Monochrome	Yes/Yes
TWAIN Compliant	Yes (Windows 10 / Windows 11)
WIA Compliant	Yes (Windows 10 / Windows 11)
Colour Depth	30 bit colour processing (Input) 24 bit colour processing (Output)
Greyscale	10 bit colour processing (Input) 8 bit colour processing (Output)
Resolution	Up to 19200 × 19200 dpi (interpolated) ^{1 2} (from Scanner Glass) Up to 1200 × 2400 dpi (optical) (from ADF) ³ Up to 1200 × 600 dpi (optical)